


PERFORMANCE

TEMPERATURE RANGE	-40°C / +5°C
CAPABILITIES	5 trays
STEP GASTRONOMY GUIDES	68 mm
STEP PASTRY GUIDES	17.5 mm
STEP ICE CREAM GUIDES	17.5 mm
ICE CREAM TRAYS 165x360x120h mm	6 TANKS 165
ICE CREAM TRAYS 250x360x120h mm	4 TANKS 265

CHECK



FEATURES

- Core probe
- Latest generation fans
- Insulation in high density expanded polyurethane (approximately 42 kg/m³), HCFC free - Thickness 60 mm
- Core probe
- Total inspectability of the room for maximum hygiene
- Condensate collection tray
- Door reversible on site
- Refrigerant fluid R290
- Evaporating coil in copper-aluminum, cataphoresis painted with non-toxic epoxy resin
- 2.8" LCD graphic display and capacitive keys
- IPX4 organized electrical panel on the front, easy to access

OPTIONAL

- Water condensing unit
- Wheel kit
- 4.0 bi-directional connectivity and Wi-Fi

STANDARD EQUIPMENT

AISI 304 stainless steel supports for GN1/1 or 600x400 trays

OPTIONAL EQUIPMENT

Internal structure with variable pitch with 5 pairs of removable "L" shaped guides in AISI 304 stainless steel, which can be positioned by interlocking every 17.5 mm

Internal structure with variable pitch with 5 pairs of removable anti-tilt "C" shaped guides in AISI 304 stainless steel, which can be positioned by interlocking every 17.5 mm

DIMENSIONS

Width	790 mm [31.1 in]
Depth	840 mm [33.07 in]
Height	850 mm [33.46 in]
Weight	86 kg [189.63 lb]
Foot height	70-110 mm [2.76-4.33 in]
Door light width 1	670 mm [26.38 in]
Door light height 1	370 mm [14.57 in]
Door depth open 90°	1545 mm [60.83 in]
Internal depth	410 mm [16.14 in]
Packaging width	850 mm [33.46 in]
Packing depth	900 mm [35.43 in]
Packaging height	995 mm [39.17 in]
Packing weight	101 kg [222.71 lb]
Packing volume	0.76 m ³ [201.08 glus]

TECHNICAL DATA

Temperature range	-40°C / +5°C
Insulation thickness	60 mm [2.36in]
Number of rooms	1
Door type	Blind
Number of doors	1
Condensation type	Air
Plant type	Motor on board
Plant type	Ventilated
Compressor type	Hermetic
Refrigerant gas	R290
GWP refrigerant gas	3
Refrigerant gas quantity g	131 g [8.19oz]
Sound power	<70 dbA
Expansion valve type	Mechanics
Defrost type	With the door open
Defrost water evaporation	Automatic
Interior lighting	Not present
Cooling power	2002 W
Climatic class	5
Heat expelled	2500 W
Air volume	1 m ³ /h

CAPABILITIES

GN guides step	68 mm
Step guides EN	17.5 mm

CAPABILITIES

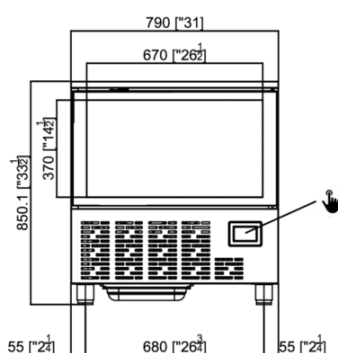
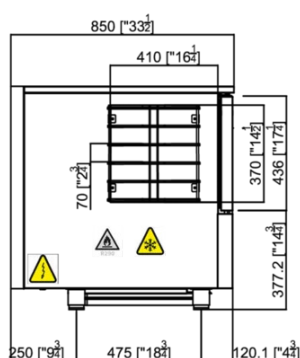
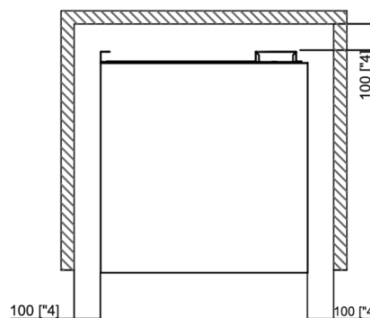
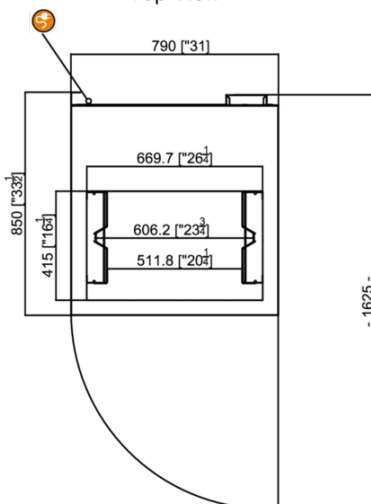
Step IC guides	17.5 mm
Tanks 165	6
Tanks 250	4


SUPPLY


Power supply	220-240 V ~ 50 Hz
Max cold power	1559 W
Max cold absorption	7.84 A
Power cable	3G 1,5 mm ²
Power plug	CE-Schuko


PERFORMANCE

Product yields +65°C/+10°C	21 kg [46.3lb]
Product yields +65°C/-18°C	15 kg [33.08lb]
Consumption UNI EN ISO22042 [hard +3°C]	0.08 kW/kg
Consumption UNI EN ISO22042 [hard -18°C]	0.29 kW/kg


DIMENSIONS
Vista Frontale
Frontal side

Vista Laterale
Lateral side

Vista Superiore
Top View


 Display con tasti capacitivi
 Display with capacitive keys

 Cavo alimentazione elettrica
 Power supply cable

 Impianto frigo
 Refrigeration system

 Scatola elettrica
 Electric box

 Tubo scarico acqua
 Drain pipe